



Nitto tape Hyperflash 695

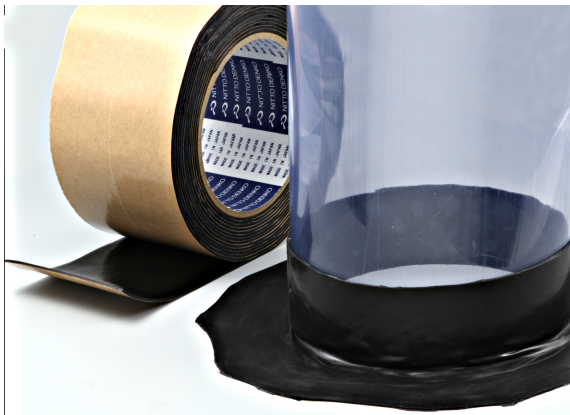

Filoform Hyper Flash No.695 is a combination of deformable rubber substrate, butyl rubber adhesive, and release paper. It fits tightly around irregular shapes like sewage pipes and corner joints to shut out water and air

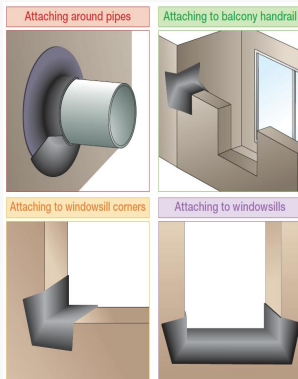

Features

- Material is extremely stretchable in all directions and deformable up to 580%
- Tape can be applied without the formation of seams and folds
- Adhesive provides an exceptional bond to wood, plastics, metal, glass and stone

Specifications

Material	EPDM rubber
Adhesive type	Butyl based
Total thickness	1.32mm
Tensile strength	9.8 N/10mm
Elongation at break	580%
Adhesion on multiplex	21.2 N/10mm
Storage humidity	40-75%

Nitto tape Hyperflash 695

More info

[Download: Installation instructions](#)

<http://filoform.co.uk/nitto-tape>

Products

Art.nr.	Product Name	Dimensions	Colour	Order unit
800485UK	Hyperflash 6951A, 75mm x 5m	75mm x 5m x 1,3mm	black	18 pcs/carton