

Kabeline 2375 GLM epoxy resin



The Kabeline 2375 Resin is specially developed for the potting of electrical components. Conductivity sensors for alarm slipperiness systems of RWS

Features

- Excellent adhesion to steel
- Low curing temperature
- Slow curing of a few days
- Excellent mechanical properties
- Packed in transparent 2 component pack
- 2-component bag with the resin and hardener always supplied in the right volumes and mixture
- Resin which remains in the bag after mixing can be left for hardening and then can be disposed of as normal waste


Specifications

[Mixing instructions](#)

Kabeline 2375 GLM epoxy resin

More info

[Download: Mixing instructions](#)

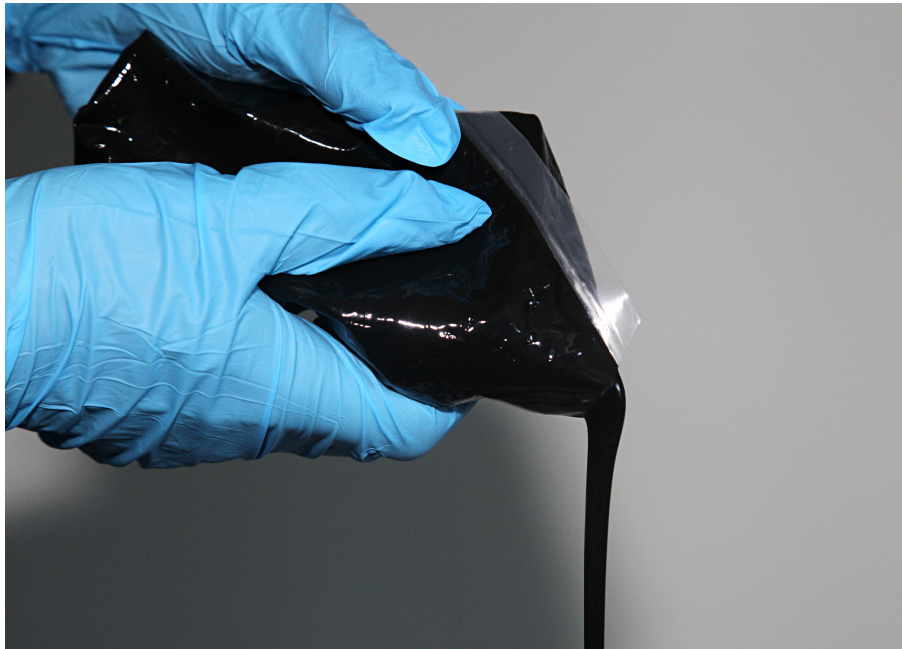

Products

Art.nr.	Product Name	Colour	Content	Order unit
80090UK	Kabeline 2375 GLM 550 gram	anthracite	550 gram	10 pcs/carton