



# Thin wall heat shrink tube 2:1 & 3:1

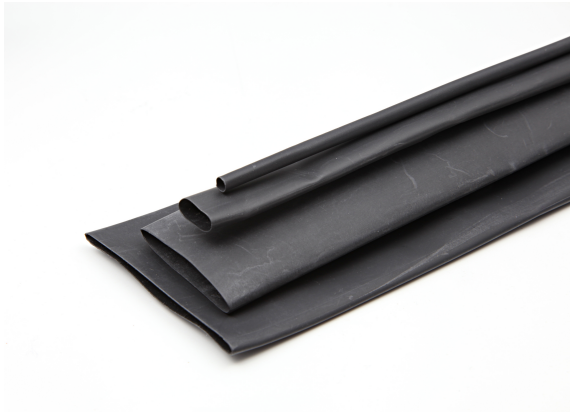

Electrical isolation Cable protection Bundling Identification

## Features

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +125°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flame retardant
- Flexible
- Cadmium free
- Other colours on request: red, blue, yellow, green, white

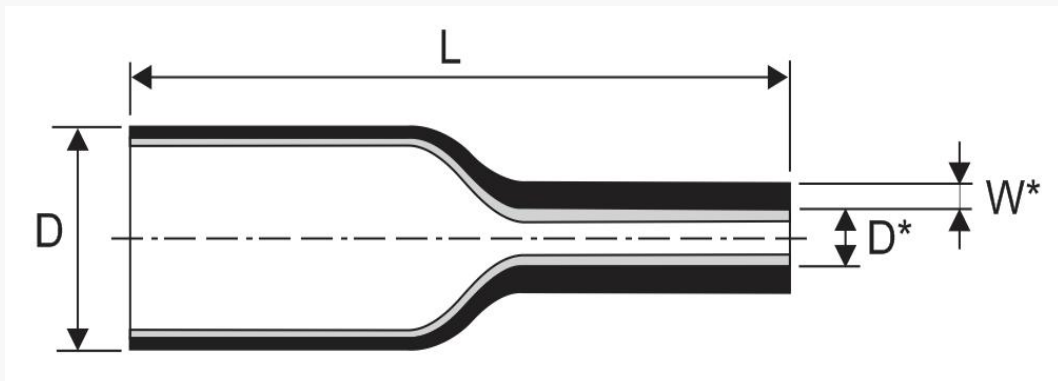

# Thin wall heat shrink tube 2:1 & 3:1

## Specifications

Material	Polyolefine	
Shrink temperature	70°C till 100°C	
Continuous temperature range	-55°C till +125°C	
Dielectric strength	≥ 20 kV/mm	IEC 243
Volume resistivity	> 1 x 10 <sup>14</sup> ohm cm	IEC 93
Tensile strength	≥ 14 Mpa	ASTM D 638-98
Elongation at break	≥ 400%	ASTM D 638-98
Longitudinal change	≤ 5%	UL 224

# Thin wall heat shrink tube 2:1 & 3:1

## Products

Art.nr.	Product Name	Diameter before shrink (mm)	Diameter after shrinkage (mm)	Wall thickness after shrink (mm)	Colour	Order unit
8.108100UK	Shrink tube TW black 1,5/0,5	1,5	0,5	0,45	black	50 pcs x 1200mm
8.108102UK	Shrink tube TW black 6,0/2,0	6,0	2,0	0,65	black	50 pcs x 1200mm
8.108104UK	Shrink tube TW black 1,6/0,8	1,6	0,8	0,36	black	50 pcs x 1200mm
8.108105UK	Shrink tube TW black 2,4/1,2	2,4	1,2	0,40	black	50 pcs x 1200mm
8.108106UK	Shrink tube TW black 3,2/1,6	3,2	1,6	0,40	black	50 pcs x 1200mm
8.108107UK	Shrink tube TW black 4,8/2,4	4,8	2,4	0,50	black	50 pcs x 1200mm
8.108108UK	Shrink tube TW black 6,4/3,2	6,4	3,2	0,55	black	25 pcs x 1200mm
8.108109UK	Shrink tube TW black 9,5/4,8	9,5	4,8	0,55	black	25 pcs x 1200mm
8.108110UK	Shrink tube TW black 12,7/6,4	12,7	6,4	0,65	black	25 pcs x 1200mm
8.108111UK	Shrink tube TW black 19,1/9,5	19,1	9,5	0,80	black	25 pcs x 1200mm
8.108112UK	Shrink tube TW black 25,4/12,7	25,4	12,7	0,90	black	25 pcs x 1200mm
8.108113UK	Shrink tube TW black 38,1/19	38,1	19	1,00	black	25 pcs x 1200mm

## Thin wall heat shrink tube 2:1 & 3:1