


# Medium wall shrink tube with adhesive 3:1 & 4:1



Cable joints and cable terminations  
Cables up to 1kV  
Telecommunication  
For indoor and outdoor use:  
underground, above ground, under water and in cable ducts

## Features

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +90°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flexible
- Cadmium free and halogen free
- Colour: black

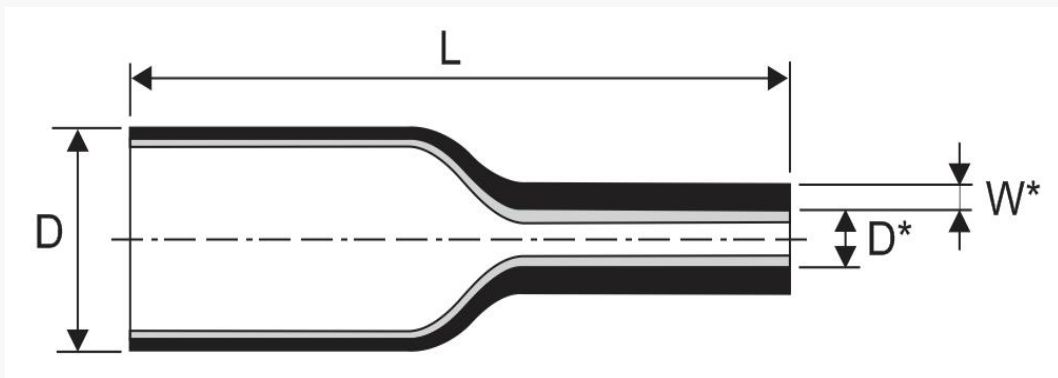

# Medium wall shrink tube with adhesive 3:1 & 4:1

## Specifications

Material	Polyofine	
Shrink temperature	> 125°C	
Continuous temperature	-55°C till +90°C	
Dielectric strength	≥ 15 kV/mm	ASTM D 2671-98
Volume resistivity	> 1 x 10 <sup>12</sup> ohm cm	ASTM D 257-98
Heatshock (30 min/200°C)	No damage	ASTM D 2671-98
Tensile strength	≥ 12 Mpa	ASTM D 2671-98
Elongation at break	≥ 400%	ASTM D 2671-98
Longitudinal change	≤ 15%	ASTM D 2671-98
Water absorbtion	≤ 0,5%	ASTM D 570

# Medium wall shrink tube with adhesive 3:1 & 4:1

## Products

Art.nr.	Product Name	Diameter before shrink (mm)	Diameter after shrinkage (mm)	Wall thickness after shrink (mm)	Order unit
8418005UK	Shrink tube MW 12/3	12	3	2,1	10 pcs x 1000mm
503620	Shrink tube MW 12/4	12	4	1,8	10 pcs x 1200mm
503630	Shrink tube MW 16/5	16	5	2,0	10 pcs x 1200mm
8418017UK	Shrink tube MW 20/6	20	6	2,5	10 pcs x 1000mm
8418019UK	Shrink tube MW 28/6	28	6	2,5	10 pcs x 1000mm
8418030UK	Shrink tube MW 31/8	31	8	2,5	10 pcs x 1000mm
8418040UK	Shrink tube MW 41/12	41	12	2,5	10 pcs x 1000mm
8418050UK	Shrink tube MW 56/18	56	18	2,5	10 pcs x 1000mm
503690	Shrink tube MW 65/19	65	19	2,7	10 pcs x 1200mm
8418070UK	Shrink tube MW 75/23	75	23	2,5	10 pcs x 1000mm
503720	Shrink tube MW 100/25	100	25	3,2	5 pcs x 1200mm
503730	Shrink tube MW 115/34	115	34	3,2	5 pcs x 1200mm
503740	Shrink tube MW 140/42	140	42	3,3	5 pcs x 1200mm