



# Heavy wall shrink tube with adhesive 3:1 & 4:1

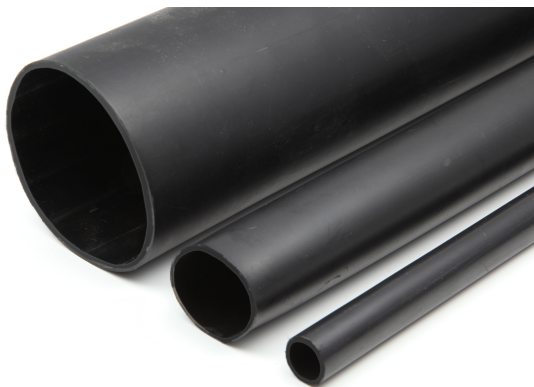

Cable joints and cable terminations  
Cables up to 1kV  
Telecommunication  
For indoor and outdoor use:  
underground, above ground, under water and in cable ducts

## Features

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +90°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flexible
- Cadmium free and halogen free
- Colour: black

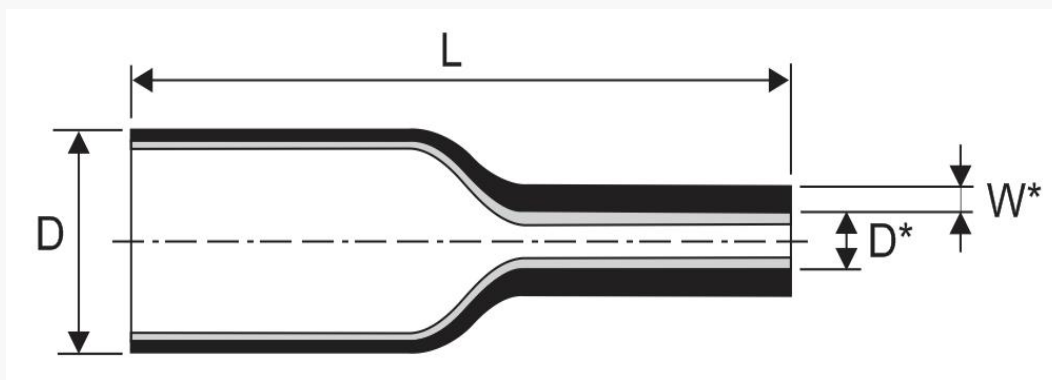

# Heavy wall shrink tube with adhesive 3:1 & 4:1

## Specifications

Material	Polyofine	
Shrink temperature	> 125°C	
Continuous temperature	-55°C till +90°C	
Dielectric strength	≥ 15 kV/mm	ASTM D 2671-98
Volume resistivity	> 1 x 10 <sup>12</sup> ohm cm	ASTM D 257-98
Heatshock (30 min/200°C)	No damage	ASTM D 2671-98
Tensile strength	≥ 12 Mpa	ASTM D 2671-98
Elongation at break	≥ 400%	ASTM D 2671-98
Longitudinal change	≤ 15%	ASTM D 2671-98
Water absorbtion	≤ 0,5%	ASTM D 570

# Heavy wall shrink tube with adhesive 3:1 & 4:1

## Products

Art.nr.	Product Name	Wall thickness after shrink (mm)	Order unit
504600	Shrink tube HW 9/3	2,2	10 pcs x 1200mm
504610	Shrink tube HW 13/4	2,3	10 pcs x 1200mm
504620	Shrink tube HW 19/6	2,6	10 pcs x 1200mm
8414035UK	Shrink tube HW 33/8	3,2	10 pcs x 1200mm
504640	Shrink tube HW 40/12	3,2	10 pcs x 1200mm
8414060UK	Shrink tube HW 55/16	4,0	10 pcs x 1000mm
504670	Shrink tube HW 65/21	4,0	10 pcs x 1200mm
504677	Shrink tube HW 85/25	4,0	10 pcs x 1200mm
504680	Shrink tube HW 100/30	4,0	5 pcs x 1200mm
504695	Shrink tube HW 125/40	4,0	5 pcs x 1200mm
504700	Shrink tube HW 130/36	4,0	5 pcs x 1200mm
504710	Shrink tube HW 160/50	4,0	5 pcs x 1200mm