

Taped resin injection joint




Universal application; the injection joints can be adjusted to any situation "on the spot", also for cable repairs. Connection-, branch-off joints and cable end joints can be made with just a limited number of basic components. Download the calculation program or use it ONLINE under the tab "Calculator"

Taped resin injection joint

Features

- Only 6 basic components can make every type/size of joint
- Optimum flexibility, independent of size and type of connector
- Universally applicable, the Taped resin injection joint can be adapted to any situation, including repairs to damaged cable oversheets
- Suitable for complicated cable connections and cables running horizontally or bended
- The wrapping gauze is used to create sufficient insulation distance between the conducting parts within the injection joint
- Installation is just as quick as a cast resin joint, but with less preparation and you can close the ground right away
- Resin can be applied on live cables, It is not necessary to wait for the resin to cure.
- The resin is injected under pressure with the use of the injection pump
- As the resin is filled "under pressure", possible air will be driven out of the cable connection, thus allowing no spots where water or moisture can enter into the joint on the longer term
- Totally resistant against moisture, even when applied on wet cables.
- Clear visibility of filling process
- The strong mesh, in combination with the resin ensures a good mechanical protection over the entire length of the joint
- Environmental friendly and economical; the compact dimensions of injection joints ensure a minimal use of resin and materials
- Filoform produces and supplies all components in accordance with international standards and with the ISO 9001-2008 quality standard
- The Filoform injection joints are approved in accordance with the standard DIN EN 50393 (VDE 0278-393):2006-11.
- Total moisture resistance (HD 631-1), even when mounted on wet cables
- Low stock values
- Saving of space in your warehouse and in your service vans
- Always the correct materials available for all types of cable joints
- Minimal use of resin thanks to the compact dimensions

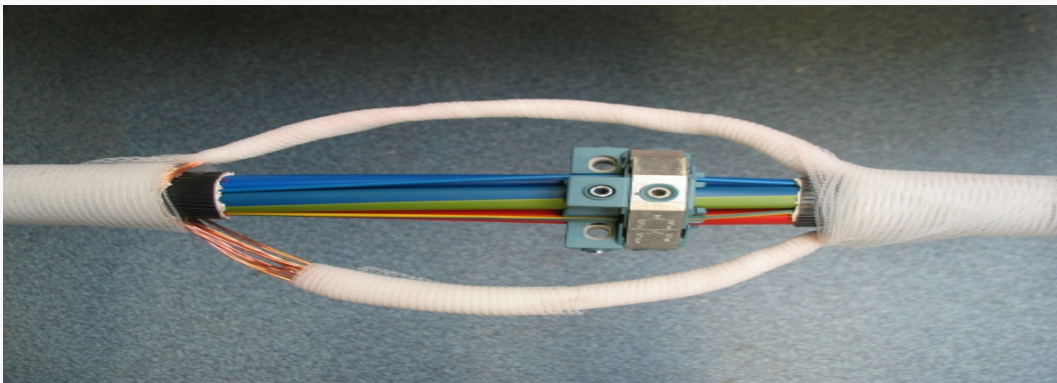

Taped resin injection joint

Products

Art.nr.	Product Name	Dimensions	Colour	Content	Order unit
80397KUK	Injection gun GN-E5 with ball bearing mechanism				per piece
80467UK	Wrap-around tape 38mm x 20m transparent	38mm x 20m x 0,19mm	transparent		64 pcs/carton
910110	Wrap-around tape 50mm x 10m transparent	50mm x 10m x 0,19mm	transparent		80 pcs/carton
910120	Wrap-around tape 50mm x 20m transparent	50mm x 20m x 0,19mm	transparent		48 pcs/carton
204184	Filofill P2600 184ml		black	184ml	10 pcs/carton
204355	Filofill P2600 355ml		black	355ml	10 pcs/carton
204715	Filofill P2600 710ml		black	710ml	8 pcs/carton
80136UK	Kabeline 1611 B-pack		red	197 gram	10 pcs/carton
80137UK	Kabeline 1611 C-pack		red	380 gram	10 pcs/carton
910170	Branch-off seal universal				200 pcs/carton
80477UK	Yellow gauze 38mm x 9m				100 pcs/carton
80482UK	Wikkeldgauze flex 10cm x 3,5m				100 pcs/carton
80479UK	3D gauze 50mm x 2.3m				75 pcs/carton

Taped resin injection joint

80381UK	Injection nipple 6,1mm				10 pcs/bag
80535UK	Injection valve 6,1mm				10 pcs/bag
80370UK	Injection nipple 12,2mm				50 pcs/carton
80540UK	Injection valve 12,2mm				10 pcs/bag
80534UK	Core separator 22x8cm				per piece
80533UK	Separator strip 220x80mm				per piece