


Coax joints

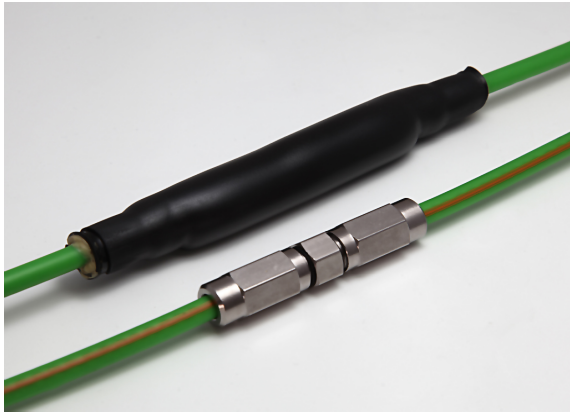

Coax connections Inside / outside / underground, above ground, underwater, in cable ducts

Features

- Filoform's coax joints uses thermoshrink technology with a special and high quality sealing material
- Easy installation
- Less heat to be applied for the shrinking process
- Excellent protection of the cable and connector due to a lower temperature needed during the shrinking process
- High shrink ratio
- Excellent adhesion to all cable materials
- Suitable for connection and transition joints
- Guaranteed quality; the concept has been used in telecom joints for over a decade
- Suitable for underground and above ground use
- Easy to re-enter so cables and connectors can be reused

Specifications

Thickness EPT-butyl rubber	1mm	ASTM D 1000
Thickness butyl rubber petroleum jelly	1mm	
Total thickness	2mm	
Width	50mm	
Adhesion RVS	1500 g/25mm at 20°C	ASTM D 1000
Adhesion PE	1000 g/25mm at 20°C	ASTM D 1000
Tensile strength	3.0 kg/25mm	ASTM D 1000
Elongation at break	600%	ASTM D 1000
Insulation resistance	1.0 x 10 ¹⁵ ohm cm	ASTM D 257
Dielectric strength	33 kV	ASTM D 149
Water absorption	0.1%	ASTM D 570

Sealpass sealing material

More info

Contents

- Sealpass sealing material
- Heat shrink tube
- Cleaning wipes
- Sand paper
- Installation instructions

Products

Art.nr.	Product Name	Order unit
800275UK	Heat-shrink connection joint Coax 9&12	10 pcs/carton
800280UK	Heat-shrink connection joint Coax 6	10 pcs/carton
800285UK	Heat-shrink connection joint Coax 3	5 pcs/carton