


Indoor Three Core 6/10(12)kV

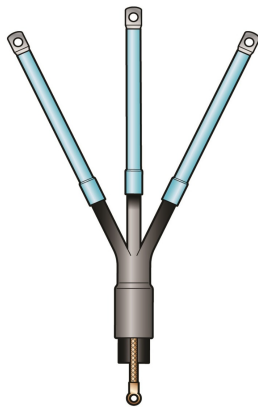

6/10(12)kv - Three core Filoform Medium Voltage Heatshrink Termination Kits are tested in accordance with CENELEC 629.1.S2 & IEC 60502-4, and suitable for Indoor applications up to 6/10(12)kv.

The Filoform range enables the installer to offer a complete solution, utilizing compression or mechanical lugs; and XLPE and EPR cable sheaths.

The Filoform range of Terminations is fully RoHS compliant.

Features

- Right-Angle Insulating Barrier Boots
- Straight Insulating Barrier Boots
- Universal (Push-on) Insulating Barrier Boots
- Bolted Top-Hat Glands for 3-Core SWA
- Compression Lugs
- Mechanical Lugs
- Pole Top Mounting Brackets and Insulators

Indoor Three Core 6/10(12)kV

Products

| Art.nr. | Product Name | Cable Diameter (mm) | Core min. (mm) | Core max. (mm ²) | Order unit |
|-----------------------|------------------------------------------------------------------------|---------------------|----------------|------------------------------|------------|
| HKIT-12/3×25-50-450 | HS Indoor Termination 6/10(12)kV - 3×25-50mm ² length 450 | Ø 12.0 - 16.0 | 25 | 50 | per piece |
| HKIT-12/3×70-150-450 | HS Indoor Termination 6/10(12)kV - 3×70-150mm ² length 450 | Ø 17.6 - 22.8 | 70 | 150 | per piece |
| HKIT-12/3×185-300-450 | HS Indoor Termination 6/10(12)kV - 3×185-300mm ² length 450 | Ø 24.0 - 31.0 | 185 | 300 | per piece |
| HKIT-12/3×400-500-450 | HS Indoor Termination 6/10(12)kV - 3×400-500mm ² length 450 | Ø 31.5 - 37.0 | 400 | 500 | per piece |