


# 12/20(24)kV - Single Core MV Joints

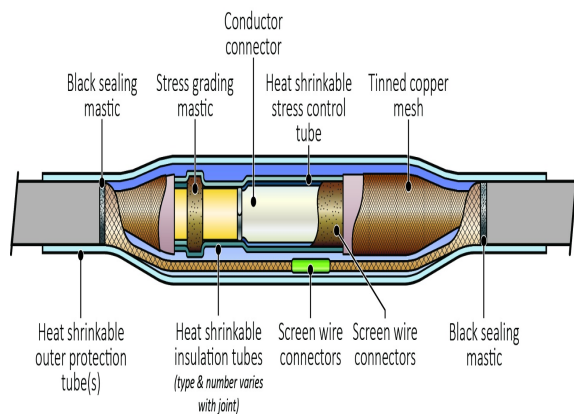

12/20(24)kV - Single Core - Filoform Medium Voltage Heatshrink Straight Cable Joints, are manufactured and tested in accordance with CENELEC 629.1.S2 & IEC 60502-4, and suitable for Indoor and Outdoor applications for 12/20(24)kV.

The Filoform range enables the installer to offer a complete solution, utilizing compression or mechanical connectors; and XLPE and EPR cable sheaths. Straight Cable Joints for Transition to PILC/PICAS are available on request.

The Filoform range of Straight Cable Joints is fully RoHS compliant.

## Features

- Complete with CTS/AWA armour kit as standard
- Suitable for Compression and Mechanical Connectors
- Suitable for EPR/XLPE and PVC cables
- Range taking
- Other voltages up to 36kV available on request
- Suitable for TRIPLEX cable
- 3 Core, Transition and Trifurcating kits available on request

# 12/20(24)kV - Single Core MV Joints

## Products

Art.nr.	Product Name	Cable Diameter (mm)	Core min. (mm)	Core max. (mm <sup>2</sup> )	Order unit
HKSJ-24/1x25-50mm	Single core 24kV / 25-50mm <sup>2</sup>	Ø 17.5 - 20.3	25	50	per piece
HKSJ-24/1x70-150mm	Single core 24kV / 70-150mm <sup>2</sup>	Ø 21.5 - 26.5	70	150	per piece
HKSJ-24/1x185-300mm	Single core 24kV / 185-300mm <sup>2</sup>	Ø 27.5 - 33.0	185	300	per piece
HKSJ-24/1x400-500mm	Single core 24kV / 400-500mm <sup>2</sup>	Ø 34.2 - 39.5	400	500	per piece
HKSJ-24/1x630mm	Single core 24kV / 630mm <sup>2</sup>	Ø 40.5 - 43.0	630	630	per piece