


18/30(36)kV - Single Core MV Joints

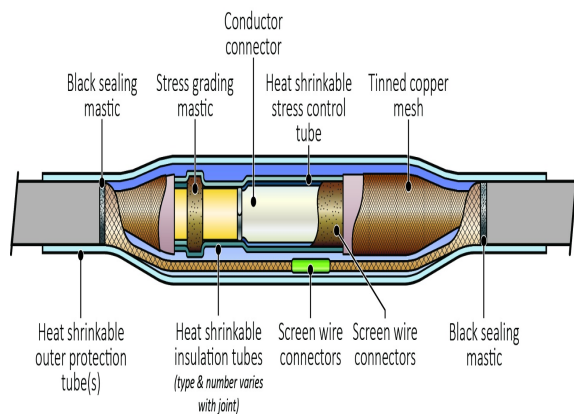

18/30(36)kV - Single Core - Filoform Medium Voltage Heatshrink Straight Cable Joints, are manufactured and tested in accordance with CENELEC 629.1.S2 & IEC 60502-4, and suitable for Indoor and Outdoor applications for 18/30(36)kV.

The Filoform range enables the installer to offer a complete solution, utilizing compression or mechanical connectors; and XLPE and EPR cable sheaths. Straight Cable Joints for Transition to PILC/PICAS are available on request.

The Filoform range of Straight Cable Joints is fully RoHS compliant.

Features

- Complete with CTS/AWA armour kit as standard
- Suitable for Compression and Mechanical Connectors
- Suitable for EPR/XLPE and PVC cables
- Range taking
- Other voltages up to 36kV available on request
- Suitable for TRIPLEX cable
- 3 Core, Transition and Trifurcating kits available on request

Products

| Art.nr. | Product Name | Cable Diameter (mm) | Core min. (mm) | Core max. (mm ²) | Order unit |
|---------------------|---|---------------------|----------------|------------------------------|------------|
| HKSJ-36/1x50-95mm | Single core 36kV / 50-95mm ² | Ø 25.0 - 29.5 | 50 | 95 | per piece |
| HKSJ-36/1x120-240mm | Single core 36kV / 120-240mm ² | Ø 30.5 - 36.5 | 120 | 240 | per piece |
| HKSJ-36/1x300-400mm | Single core 36kV / 300-400mm ² | Ø 38.0 - 42.5 | 300 | 400 | per piece |
| HKSJ-36/1x500-630mm | Single core 36kV / 500-630mm ² | Ø 43.5 - 48.5 | 500 | 630 | per piece |