


# 18/30(36)kV - Single Core MV Joints

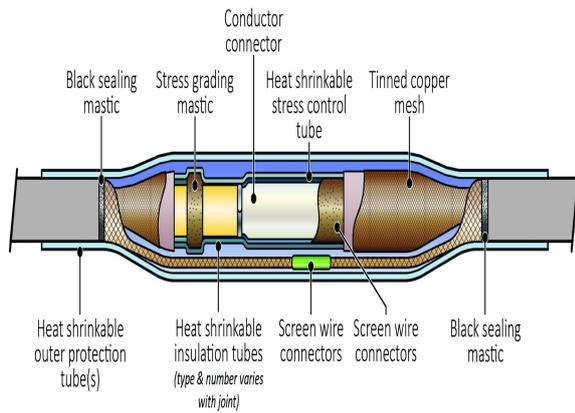

18/30(36)kV - Single Core - Filoform Medium Voltage Heatshrink Straight Cable Joints, are manufactured and tested in accordance with CENELEC 629.1.S2 & IEC 60502-4, and suitable for Indoor and Outdoor applications for 18/30(36)kV.

The Filoform range enables the installer to offer a complete solution, utilizing compression or mechanical connectors; and XLPE and EPR cable sheaths. Straight Cable Joints for Transition to PILC/PICAS are available on request.

The Filoform range of Straight Cable Joints is fully RoHS compliant.

## Features

- Complete with CTS/AWA armour kit as standard
- Suitable for Compression and Mechanical Connectors
- Suitable for EPR/XLPE and PVC cables
- Range taking
- Other voltages up to 36kV available on request
- Suitable for TRIPLEX cable
- 3 Core, Transition and Trifurcating kits available on request

## Products

Art.nr.	Product Name	Cable Diameter (mm)	Core min. (mm)	Core max. (mm <sup>2</sup> )	Order unit
HKSJ-36/1x50-95mm	Single core 36kV / 50-95mm <sup>2</sup>	Ø 25.0 - 29.5	50	95	per piece
HKSJ-36/1x120-240mm	Single core 36kV / 120-240mm <sup>2</sup>	Ø 30.5 - 36.5	120	240	per piece
HKSJ-36/1x300-400mm	Single core 36kV / 300-400mm <sup>2</sup>	Ø 38.0 - 42.5	300	400	per piece
HKSJ-36/1x500-630mm	Single core 36kV / 500-630mm <sup>2</sup>	Ø 43.5 - 48.5	500	630	per piece