


# Nitto 21 PVC tape 50mm x 20m

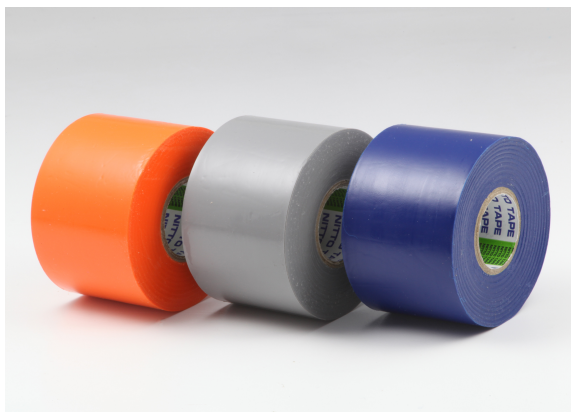

Electrical isolation Colour coding Cable bundling Corrosion preventing

## Features

- Good balance between adhesion strength, unwind force and film flexibility gives easy handling
- Elastic (memory), excellent elongation properties
- Perfect sealing properties avoiding water penetration, increases chemical and electrical resistance as well as bending properties
- Thickness 0,19mm and is an ideal tape for a wide range of applications
- Suited for outside use thanks to the good ageing and weatherability properties
- Resistant to oils, acids and alkalines

## Specifications

Film type	(soft) PVC
Thickness	0,19mm
Adhesive type	synthetic rubber based
Adhesion to 2B steel	1,85N / 10mm
Adhesion to backing	1,75N / 10mm
Tensile strength at break	193N/10mm <sup>2</sup>
Elongation at break	219%
Electrical strength	9,5kV (50 kV/mm)
Min. application temperature	- 10°C
Operating temperature	-40°C till +90°C

# Nitto 21 PVC tape 50mm x 20m

## More info

Other colours and dimensions on request

<http://filoform.co.uk/nitto-tape>

## Products

Art.nr.	Product Name	Dimensions	Colour	Order unit
800650.1UK	Nitto tape 21, 50mm x 20m black	50mm x 20m x 0,19mm	black	64 pcs/carton
800650.2UK	Nitto tape 21, 50mm x 20m blue	50mm x 20m x 0,19mm	blue	64 pcs/carton
800650.3UK	Nitto tape 21, 50mm x 20m green	50mm x 20m x 0,19mm	green	64 pcs/carton
800650.4UK	Nitto tape 21, 50mm x 20m red	50mm x 20m x 0,19mm	red	64 pcs/carton
800650.6UK	Nitto tape 21, 50mm x 20m yellow	50mm x 20m x 0,19mm	yellow	64 pcs/carton
800650.7UK	Nitto tape 21, 50mm x 20m white	50mm x 20m x 0,19mm	white	64 pcs/carton
800650.8UK	Nitto tape 21, 50mm x 20m grey	50mm x 20m x 0,19mm	grey	64 pcs/carton
800650.12UK	Nitto tape 21, 50mm x 20m orange	50mm x 20m x 0,19mm	orange	64 pcs/carton