


8.7/15(17.5)kV - Single Core MV Joints

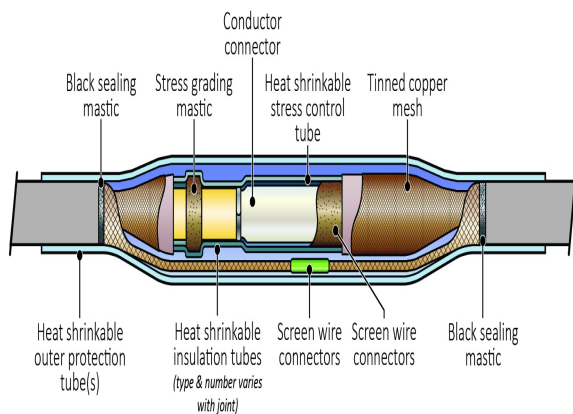

8.7/15(17.5)kV - Single Core - Filoform Medium Voltage Heatshrink Straight Cable Joints, are manufactured and tested in accordance with CENELEC 629.1.S2 & IEC 60502-4, and suitable for Indoor and Outdoor applications for 8.7/15(17.5)kV.

The Filoform range enables the installer to offer a complete solution, utilizing compression or mechanical connectors; and XLPE and EPR cable sheaths. Straight Cable Joints for Transition to PILC/PICAS are available on request.

The Filoform range of Straight Cable Joints is fully RoHS compliant.

Features

- Complete with CTS/AWA armour kit as standard
- Suitable for Compression and Mechanical Connectors
- Suitable for EPR/XLPE and PVC cables
- Range taking
- Other voltages up to 36kV available on request
- Suitable for TRIPLEX cable
- 3 Core, Transition and Trifurcating kits available on request

8.7/15(17.5)kV - Single Core MV Joints

Products

Art.nr.	Product Name	Cable Diameter (mm)	Core min. (mm)	Core max. (mm ²)	Order unit
HKSJ-17.5/1x 25-50mm	Single core 17.5kV / 25-50mm ²	Ø 16.0 - 19.5	25	50	per piece
HKSJ-17.5/1x 70-150mm	Single core 17.5kV / 70-150mm ²	Ø 20.3 - 23.5	70	150	per piece
HKSJ-17.5/1x 185-300mm	Single core 17.5kV / 185-300mm ²	Ø 24.0 - 31.0	185	300	per piece
HKSJ-17.5/1x 400-500mm	Single core 17.5kV / 400-500mm ²	Ø 31.5 - 37.0	400	500	per piece
HKSJ-17.5/1x 630mm	Single core 17.5kV / 630mm ²	Ø 38.0 - 41.9	630	630	per piece